




MANUFACTURERS OF PIPE FITTINGS

Contact Us:
 Phone: (630) 543-4777
 Fax: (630) 543-4792
 www.BILLCOCORP.com
 770 West Belden Ave.
 Addison, IL 60101

PLUGS


STEEL SQUARE HEAD PIPE PLUGS

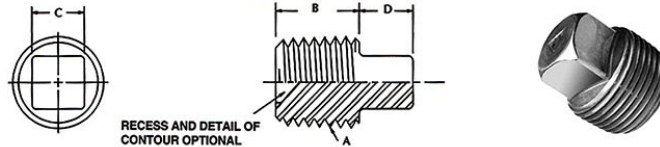

A NPTF THREAD	1/16-27	1/8-27	1/4-18	3/8-18	1/2-14	3/4-14	1-11 1/2	1 1/4-11 1/2	1 1/2-11 1/2	2-11 1/2	2 1/2-8	3-8
B BODY LENGTH, MIN.	.330	.330	.445	.495	.590	.63	.75	.80	.83	.88	1.07	1.13
C HEAD WIDTH, MIN.	.214	.276	.370	.428	.553	.62	.81	.93	1.12	1.31	1.50	1.68
D HEAD HEIGHT, MIN.	.178	.240	.280	.310	.380	.44	.50	.56	.62	.68	.74	.80

Available in:
 Black Steel, Zinc (galvanized) Plated, Stainless Steel and Lead Free Brass.
 NPTF Dryseal Taper Threads.
 ROHS, WEE, REACH Compliant.
 Made in U.S.A.

HEXAGON HEAD PIPE PLUGS



A NPTF THREAD	1/8-27	1/4-18	3/8-18	1/2-14	3/4-14	1-11 1/2	1 1/4-11 1/2	1 1/2-11 1/2	2-11 1/2	2-1/2 *	3 *
B SHOULDER LENGTH	.37	.56	.51	.61	.72	.75	.89	.89	.96	1.06	1.12
C HEAD WIDTH, NOM.	.4375	.5625	.6875	.8750	1.0625	1.3125	1.750	2.00	2.50	3.00	3.50
D HEAD THICKNESS, MIN.	.181	.181	.160	.190	.220	.250	.280	.620	.690	.750	.810

Note: All threads are Dry Seal (NPTF) -3/4" taper per foot.
 * Note: 2-1/2, 3" threads 8-NPT, 3/4" taper per foot.

Available in:
 Black Steel, Zinc (galvanized) Plated, Stainless Steel and Lead Free Brass.
 NPTF Dryseal Taper Threads.
 ROHS, WEE, REACH Compliant.
 Made in U.S.A.